

50 kVA Power Class Conversion Combo System

A liquid cooling AC/DC/AC power converter system delivering AC output from an ICE driven PM generator or the grid source, supported by a bidirectional DC energy buffer.




Key Features & Benefits

- Network stabilizer (Frequency and Voltage)
- Independent Energy Source
- Continuity against voltage drops (blackout)
- Elimination of disturbances even of very short duration
- Unlimited continuity of energy with parallelism with a motor generator
- Power scalable, parallelable

Applications

- Battery driven Gensets
- Energy Storage Devices
- Fuel Cells driven Gensets
- · Smart grids
- Hybrid/electric vehicles

Block Scheme

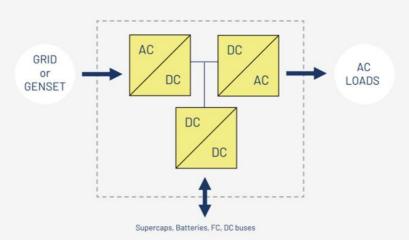

GENERALS Device type Power class Power stages technology Control stages technology Efficiency AC INPUT Device type Target Generator / Grid Rotor position sensor Grid input filter MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current MAX AC current DC IN/OUT Device type	AC/DC/AC Power Converter 50 KW IGBT DSP/FPGA – Digital Vector Control > 96% @ nominal values AC to DC converter 3ph. Sinusoidal PM brushless / 50 ÷ 60 Hz grid No (sensorless control) Not included 80 A _{rms} 320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability (4 legs, 4 wires) 50 kVA @ cos ø up to 1 (50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Power class Power stages technology Control stages technology Efficiency AC INPUT Device type Target Generator / Grid Rotor position sensor Grid input filter MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	IGBT DSP/FPGA - Digital Vector Control > 96% @ nominal values AC to DC converter 3ph. Sinusoidal PM brushless / 50 ÷ 60 Hz grid No (sensorless control) Not included 80 Arms 320/400/480 VAC DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability(4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 VAC, 3ph, 50 Hz / 480 VAC, 3ph, 60 Hz 72 Arms (@ 400VAC, 50 Hz)
Control stages technology Efficiency AC INPUT Device type Target Generator / Grid Rotor position sensor Grid input filter MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	DSP/FPGA - Digital Vector Control > 96% @ nominal values AC to DC converter 3ph. Sinusoidal PM brushless / 50 ÷ 60 Hz grid No (sensorless control) Not included 80 Arms 320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability(4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Efficiency AC INPUT Device type Target Generator / Grid Rotor position sensor Grid input filter MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	> 96% @ nominal values AC to DC converter 3ph. Sinusoidal PM brushless / 50 ÷ 60 Hz grid No (sensorless control) Not included 80 A _{rms} 320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability (4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
AC INPUT Device type Target Generator / Grid Rotor position sensor Grid input filter MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	AC to DC converter 3ph. Sinusoidal PM brushless / 50 ÷ 60 Hz grid No (sensorless control) Not included 80 A _{rms} 320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability (4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Device type Target Generator / Grid Rotor position sensor Grid input filter MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	3ph. Sinusoidal PM brushless / 50 ÷ 60 Hz grid No (sensorless control) Not included 80 A _{rms} 320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability (4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Target Generator / Grid Rotor position sensor Grid input filter MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	3ph. Sinusoidal PM brushless / 50 ÷ 60 Hz grid No (sensorless control) Not included 80 A _{rms} 320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability (4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Rotor position sensor Grid input filter MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	No (sensorless control) Not included 80 A _{rms} 320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability (4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Grid input filter MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	Not included 80 A _{rms} 320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability(4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
MAX input current Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	80 A _{rms} 320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability(4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Input voltage (MIN/NOM/MAX) AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	320/400/480 V _{AC} DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability(4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
AC OUTPUT Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	DC to AC converter as a 3ph. load supply 3ph. + N output, 100% unbalance capability(4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Device type Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	3ph. + N output, 100% unbalance capability (4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Features Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	3ph. + N output, 100% unbalance capability (4 legs, 4 wires) 50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Nominal Power Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	50 kVA @ cos ø up to 1(50 kW) 400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Nominal voltage (rms) Nominal current MAX AC current DC IN/OUT	400 V _{AC} , 3ph, 50 Hz / 480 V _{AC} , 3ph, 60 Hz 72 A _{rms} (@ 400V _{AC} , 50 Hz)
Nominal current MAX AC current DC IN/OUT	72 A _{rms} (@ 400V _{AC} , 50 Hz)
MAX AC current DC IN/OUT	
DC IN/OUT	
	150 A _{rms} , 6s (@ 400V _{AC} , 50 Hz)
Device type	
	Bidirectional, not galvanically insulated DC/DC Converter
DC Buffer Target	Supercapacitors, Batteries, Fuel Cells (sink only), DC Grid ,
Nominal Power	50kW
Voltage range	60 ÷ 600 V _{DC}
MAX DC current	200 A
Battery management AUXILIARY POWER SUPPLY	BMS connection via CANBUS
	12V _{DC} (6V _{DC} 5 sec. max)
Input voltage	
MAX input current MECHANICALS AND CONNECTIONS	10 A (only when the DCBUS is not charged; otherwise, 0 A)
Case	Painted metal
Electrical connections	Industrial grade connectors (wiring connectors not included)
Dimensions	700 x 600 x 200 mm (Connectors and brackets excluded)
Weight	100 kg.
ENVIRONMENT	100 Ng.
Cooling	Liquid cold plate, max inlet: 50°C, nominal flow 10 I/min.
Protection grade (EN60529)	IP55
Air temperature around the box	Operating -10°C ÷ +55°C
	Storage -40°C ÷ +70°C
MORE FEATURES	OANDUO
Communication	CANBUS;
Basic Protection/Alarms	Over current, Over voltage, Over temperature via CAN BUS
Limits/Parameters setting AC Output quality	ISO 8528, G3 class
Earth configuration	Can be integrated in TT, TN and IT nets. Loop impedance in TT systems < 4 0hm
Duty without energy buffer	Possible, derated
AC out parallel connection	Possible both with VSGs and traditional Gensets
THD	< 3 %
SCOPE OF SUPPLY NOTES	
Energy Storage Buffer	Batteries / Supercaps Not included
ICE control unit	Not included
НМІ	Not included
EMI filter	Not Included
AC distribution wiring / panel	Not included
Breakers	Not included
STANDARD	
Safety	EN 62477-1:2012 + A11 + A12 (Safety requirements for power electronic converter systems and equipment
Burst	EN IEC 61000-6-2:2019 (EMC - Immunity standard for industrial environments
Surge	EN IEC 61000-6-2:2019 (EMC - Immunity standard for industrial environments
RF Immunity	EN IEC 61000-6-2:2019 (EMC - Immunity standard for industrial environments
Voltage dips	EN IEC 61000-6-2:2019 (EMC - Immunity standard for industrial environments
ESD	EN IEC 61000-6-2:2019 (EMC - Immunity standard for industrial environments
Harmonic Emissions	EN 61000-3-12:2011 (EMC - Limits for harmonic currents produced by equipment connected to public low-voltage systems)
Conducted Emissions	EN IEC 61000-6-4:2019 (EMC - Emission standard for industrial environments
Radiated Emissions	EN IEC 61000-6-4:2019 (EMC - Emission standard for industrial environments
OPTIONS	Z.T. 25 5.556 6 Tr. 25 To Territorio Totalidad a for industrial offyll offiliofito
Custom Communication	CANBUS protocol as per customer's specifications